




TempoTM

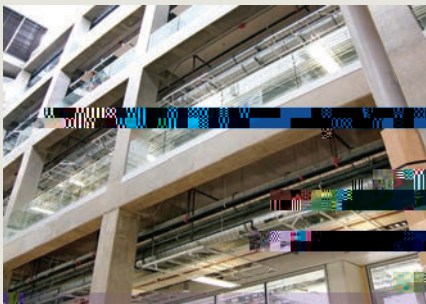

Tempo concrete is the correct choice for many applications. It is not an alternative to good concrete practices; all concrete must be cured in compliance with CSA A23.1-14.

Heidelberg Materials introduces Tempo concrete, our high early-strength concrete designed to achieve early age strength [€ (€ ~ ° u [€ (6 è [Ç V î Æ Ĩ³ » ° 6 ([# (°³ Æ n 6 needs and requirements.

Each Tempo mix is individually designed depending on your needs and can be tailored to achieve early strength requirements in 1, 2, 3 or 7 days. Tempo concrete is the ideal choice for applications that demand an achieved early strength prior to utilization (repairs or fast track scheduling).

Tempo concrete is engineered to produce desired strengths while maintaining the plastic and hardened properties typically required. It is available in the standard range of workability and slump values for ease of placement and consolidation.

Our engineered Tempo concrete mixes are batched meticulously with very small variations using our automated systems. Our Quality Control

•

Reduced stripping times

• Earlier serviceability

• x î 36 / Ĩ (6 /³ î [€ O Ç [-6 • \$ Æ Æ³ [€ O ° ° u [(Ç [Æ € -

Common applications

• High-rise suspended slabs—where early stripping strength is needed for optimal turnover of form work

• Columns and walls

• -6 ° [³ » Ç Æ [³ ° Æ³ Ç Ç í [è î » w V [OV Š Ĩ » 6 Ç³ (° Ç 6 ~ 6 € O and parking areas



heidelberg materials